


Generator JP80

Description

Jet[®] Generators

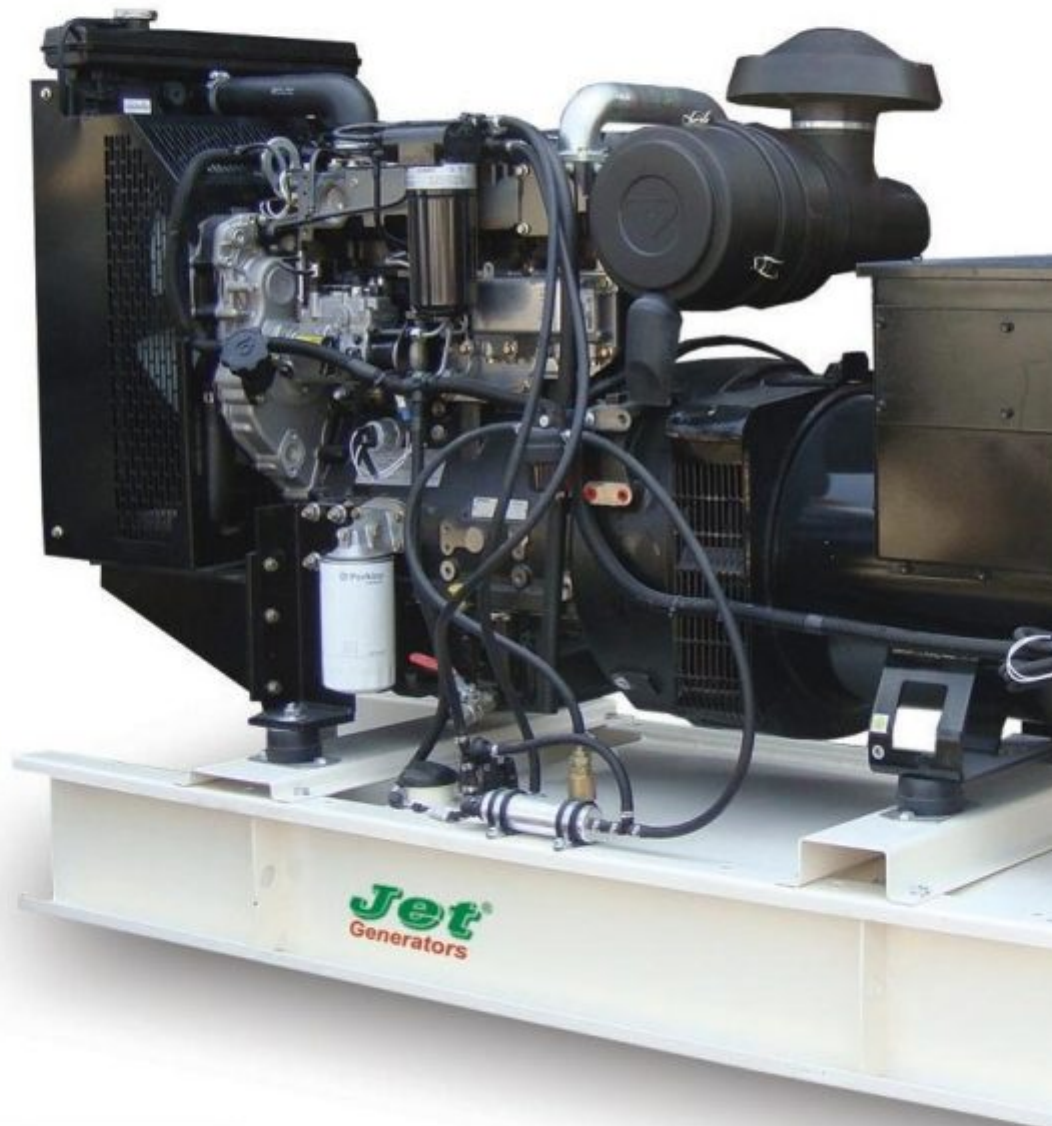

POWERED BY:





Generating Set pictured may include optional

GENERATING SET MODEL (JP80)

Output Ratings	Prime	Standby
380-415 V, 3 ph, 50 Hz, 1500 rpm	80 KVA	88 KVA
	64 KW	70.4 KW

480 V, 3 ph, 60 HZ, 1800 rpm

90 KVA 100 KVA

72 KW 80 KW

*Rating at 0.8 Power
Factor*

GENERATING SET MODEL (JP80)

Engine Make	Perkins
Engine Model	1104A-44TG2
Governing Type	Mechanical
Number of Cylinders	3
Cylinder Arrangement	Vertical in line
Bore and Stroke mm	105 x 127
Displacement / Cubic Capacity litres	4.4
Induction System	Turbocharged
Cycle	4 stroke
System Combustion	Direct Injection
Compression Ratio	17.25:1
Rotation	Anti-clockwise, viewed on flywheel
Cooling System	Water – cooled
Frequency and Engine Speed	50Hz & 1500rpm 60HZ & 1800rpm

	Prime	Standby	Prime	Standby
Gross Engine Power KW (hp)	73.4 (98.4)	80.7 (108.2)	84.5 (113.3)	93.0 (124.7)
Fuel Consumption @ 50% load L/hr	9.7		11.9	
@ 75% load L/hr	14		16.9	
@ 100% load L/hr	18.7	20.5	22.3	24.4
Total Lubrication System Capacity litres	8	8	8	8
Total Coolant Capacity (Inc. radiator) litres	13.0	13.0	13.0	13.0
Exhaust Temperature: °C	555	580	535	560
Radiator Cooling Air Flow (Min): m³/sec	1.48	1.48	1.85	1.85
Combustion Air Flow: m³/min	4.8	5.14	6.2	6.5

Exhaust Gas Flow: m ³ /min	12.5	13.3	15	15.85
Fuel Tank Capacity: litres	109	109	109	109

DIMENSIONS AND WEIGHT

Length cm	Width cm	Height cm	Weight* Kg (wet)
202	73	124	1010

STANDARD SPECIFICATIONS

1 – ENGINE

Perkins four stroke heavy duty high-performance industrial type Diesel engine.

2 – ENGINE FILTRATION SYSTEM

- Cartridge type dry air filter
- Cartridge type fuel filter
- Full flow lube oil filter

All filters have replaceable elements

3 – COOLING RADIATOR

Radiator and cooling fan, complete with safety guards, designed to cool the engine at high ambient temperatures.

4 – EXHAUST SYSTEM

Heavy Duty Industrial Exhaust Silencer:

Silencer noise reduction level: 13(dB)

Maximum Allowable Back Pressure: 10.0 50 Hz / 15.0 60Hz

5 – CIRCUIT BREAKER TYPE

ABB 3 pole MCCB. (4 pole is optional)

ALTERNATOR DATA

Make	Leroy Somer
Model	LSA43.2LB / LSA44.3S3
No. of bearings	1
Insulation class	H
Total Harmonic Content	< 2%
Wires	12
Ingress Protection	IP23
Excitation System	SHUNT
Winding Pitch	2/3 (bob 6)
AYR Model	R250
Overspeed	2250 min ⁻¹
Voltage Regulation	± 0.5%
Short Circuit Capacity	–
PMG Excitation System Available as Optional	

CONTROL PANEL

Make Deep Sea

Model DSE6110

The

DSE6110 is an Auto Start Control Module for single genset applications. It includes a backlit LCD display which clearly shows the status of the engine all the times. This module can either be programmed using the front panel or by using the DSE configuration suite PC software.

Metering and Alarm Indications:

- Generator frequency
- Underspeed, Overspeed
- Generator volts (L-L, L-N)
- Engine oil pressure
- Engine coolant temperature
- Fuel level (warning or shutdown) – optional
- Hours run counter
- Battery volts
- Fail to start/stop
- Emergency stop
- Failed to reach loading voltage/frequency

- Charge fail
- Loss of magnetic pick-up signal – optional
- Low DC voltage
- CAN diagnostics and CAN fail/error

ALL INSPIRED DESIGN TO MEET YOUR NEEDS

RATINGS DEFINITION

Prime Power

These ratings are applicable for supplying continuous electrical power (at variable load) in lieu of commercially purchased power. 10% overload power is available for 1 hour in 12 hours continuous operation.

Standby Power

These ratings are applicable for supplying continuous electrical power (at variable load) in the event of a utility power. No overload is permitted on these ratings.

STANDARD REFERENCE CONDITIONS

Output ratings are presented at 25°C air inlet temperature, barometric pressure 100 kPa, relative humidity 30%. This generating set is designed to operate at high ambient temperatures (up to 55°C), humidity (up to 99%) and higher attitudes. De-rating may apply, please consult your dealer for specific site ratings.

AVAILABLE OPTIONS AND ACCESSORIES

We offer a range of optional features and accessories to tailor our generating sets to meet your power needs.

OPTIONS

- * A variety of generating set control and synchronizing panels
- * Additional protection alarms and shutdowns
- * Water fuel separator
- * Water jacket heater
- * Battery charger

ACCESSORIES

- * Genuine spare parts
- * Load banks
- * Auxiliary fuel tanks
- * Manual & automatic transfer switches

STANDARD SPECIFICATIONS

6. FUEL SYSTEM

On Generating Sets up to 700 KVA, the baseframe design is incorporated with an integral fuel tank with a capacity of approx. 8 hours running at Full Load. The tank is supplied complete with full cap breather, fuel feed and return lines to the Engine and drain plug.

7. ALTERNATOR

7.1 INSULATION SYSTEM

- The insulation system is Class H.
- All windings are impregnated in either a triple dip thermosetting liquid, oil and acid resisting polyester varnish or vacuum pressure impregnated with a special polyester resin.
- Heavy coat of antitracking varnish additional protection against moisture or condensation.

7.2 AUTOMATIC VOLTAGE REGULATOR (AVR)

The fully sealed Automatic Voltage Regulator maintains the Voltage Regulation at 1% Nominal adjustment by means of a trim pot incorporated on the AVR.

7.3 MOTOR STARTING

An overload capacity equivalent to 300% of the Full Load impedance at zero Power Factor can be sustained for 10 seconds, when PMG option is fitted.

8. MOUNTING ARRANGEMENT

8.1 BASE FRAME

The complete Generating Set is mounted as a whole on a heavy duty fabricated steel Baseframe.

8.2 COUPLING

The Engine and Alternator are directly coupled by means of an SAE flange. The Engine flywheel is flexibly coupled to the Alternator rotor.

8.3 ANTI-VIBRATION MOUNTING PADS

Anti-Vibration pads are affixed between the Engine/ Alternator feet and the Baseframe thus ensuring complete vibration isolation of the rotating assembly.

8.4 SAFETY GUARDS

The Fan & Fan Drive along with the Battery Charging Alternator are Safety Guard protected for personnel protection.

9. FACTORY TESTS

- * The Generating set is load tested before dispatch

- * All protective devices control functions and site load conditions are simulated, The generator and its systems are checked before dispatch.

10. EQUIPMENT FINISHING

All mild steel components are fully degreased and painted with powder coated paint to ensure maximum scuff resistance and durability.

11. DOCUMENTATIONS

Operation & Maintenance manual, Circuit wiring diagrams, and Commissioning / Fault Finding Instruction leaflets are accompanied with the Generator.

12. QUALITY STANDARDS

The equipment meets the following standards: BS4999, BS5000, BS5514, IEC 60034, VDE0530, NEMA MG 1 22 and ISO 8528

13. WARRANTY

All of the Generating Sets are covered under a warranty policy for a period of 12 months. Warranty of the equipment is in line with manufacturer's warranty terms & conditions.

In line with continuous product development, we reserve the right to change specifications without notice.